





MSS SP - 79 SW REDUCER INSERTS

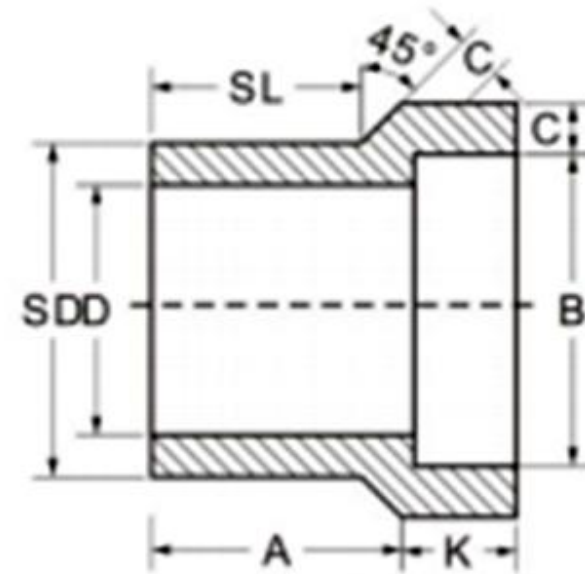

Type 1

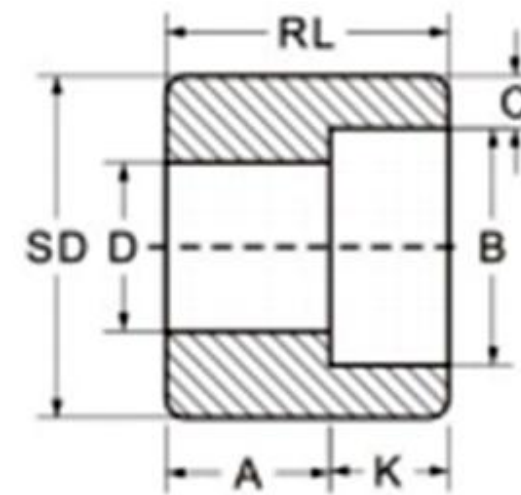

Type 2

JINIE TECHNOLOGY (JIANGSU) CO., LTD.

ASME B16.11 SW Reducer Inserts

Nominal size		Type		Socket diameter	Min. Depth of socket	Shank diameter	Laying Length		Bore		Wall thickness		Length			
DN	NPS	3000	6000	B	Kmin	SD	A		D		C		SL		RL	
							3000	6000	3000	6000	3000	6000	3000	6000	3000	6000
10×8	3/8×1/4	1	1	14.3	9.5	17.1	19.1	21.3	9.2	6.4	3.8	4.6	14.2	15.7	—	—
15×10	1/2×3/8	1	1	17.7	9.5	21.3	20.6	23.1	12.5	9.1	4.0	5.0	15.7	15.7	—	—
×8	×1/4	1	1	14.3	9.5		20.6	20.6	9.2	6.4	3.8	4.6	15.7	15.7	—	—
20×15	3/4×1/2	1	1	21.9	9.5	26.7	22.4	25.4	15.8	11.8	4.7	6.0	17.5	19.1	27.0	—
×10	×3/8	2	1	17.7	9.5		15.7	22.4	12.5	9.1	4.0	5.0	—	19.1	27.0	32.0
×8	×1/4	2	2	14.3	9.5		17.5	22.4	9.2	6.4	3.8	4.6	—	—	—	—
25×20	1×3/4	1	1	27.3	12.5	33.4	23.9	28.5	20.9	15.5	4.9	7.0	19.1	20.6	—	—
×15	×1/2	2	1	21.9	9.5		15.7	28.5	15.8	11.8	4.7	6.0	—	20.6	28.5	—
×10	×3/8	2	2	17.7	9.5		17.5	22.4	12.5	9.1	4.0	5.0	—	—	28.5	33.3
×8	×1/4	2	2	14.3	9.5		19.1	23.9	9.2	6.4	3.8	4.6	—	—	28.5	33.3
32×25	1¼×1	1	1	34.0	12.5	42.2	25.4	30.2	26.6	20.7	5.7	7.9	20.6	22.4	—	—
×20	×3/4	2	2	27.3	12.5		17.5	20.6	20.9	15.5	4.9	7.0	—	—	31.8	34.8
×15	×1/2	2	2	21.9	9.5		19.1	22.4	15.8	11.8	4.7	6.0	—	—	31.8	34.8
×10	×3/8	2	2	17.7	9.5		20.6	23.9	12.5	9.1	4.0	5.0	—	—	31.8	34.8
×8	×1/4	2	2	14.3	9.5		22.4	25.4	9.2	6.4	3.8	4.6	—	—	31.8	34.8
40×32	1½×1¼	1	1	42.8	12.5	48.3	28.5	35.1	35.1	29.5	6.1	7.9	22.4	25.4	—	—
×25	×1	2	1	34.0	12.5		17.5	29.2	26.6	20.7	5.7	7.9	—	25.4	33.3	—
×20	×3/4	2	2	27.3	12.5		19.1	25.4	20.9	15.5	4.9	7.0	—	—	33.3	39.6
×15	×1/2	2	2	22.0	9.5		20.6	26.9	15.8	11.8	4.7	6.0	—	—	33.3	39.6
×10	×3/8	2	2	17.7	9.5		22.4	28.5	12.5	9.1	4.0	5.0	—	—	33.3	39.6
50×40	2×1½	1	1	48.9	12.5	60.3	31.8	38.9	40.9	34.0	6.4	8.9	25.4	28.7	—	—
×32	×1¼	2	2	42.8	12.5		20.6	23.9	35.1	29.5	6.1	7.9	—	—	38.1	41.2
×25	×1	2	2	34.0	12.5		22.4	25.4	26.6	20.7	5.7	7.9	—	—	38.1	41.2
×20	×3/4	2	2	27.3	12.5		23.9	26.9	20.9	15.5	4.9	7.0	—	—	38.1	41.2
×15	×1/2	2	2	21.9	9.5		25.4	28.5	15.8	11.8	4.7	6.0	—	—	38.1	41.2
65×50	2½×2	1	1	61.4	16.0	73.0	46.0	42.7	52.5	42.9	6.9	10.9	38.1	31.8	—	—
×40	×1½	2	2	48.9	12.5		35.1	35.1	40.9	34.0	6.4	8.9	—	—	53.9	53.9
×32	×1¼	2	2	42.8	12.5		36.6	36.6	35.1	29.5	6.1	7.9	—	—	53.9	53.9
×25	×1	2	2	34.0	12.5		38.1	38.1	26.6	20.7	5.7	7.9	—	—	53.9	53.9
×20	×3/4	2	2	27.3	12.5		39.6	38.1	20.9	15.5	4.9	7.0	—	—	53.9	53.9
80×65	3×2½	1	1	74.1	16.0	88.9	38.1	57.2	62.7	54.0	8.8	11.9	31.8	44.5	—	—
×50	×2	2	2	61.4	16.0		25.4	31.8	52.5	42.9	6.9	10.9	—	—	47.5	53.9
×40	×1½	2	2	48.9	12.5		28.5	31.8	40.9	34.0	6.4	8.9	—	—	47.5	53.9
×32	×1¼	2	2	42.8	12.5		30.2	31.8	35.1	29.5	6.1	7.9	—	—	47.5	53.9
×25	×1	2	2	34.0	12.5		31.8	31.8	26.6	20.7	5.7	7.9	—	—	47.5	53.9
100×80	4×3	2	1	90.0	16.0	114.3	33.3	54.0	77.9	66.6	9.5	13.8	—	—	60.5	—

JINIE TECHNOLOGY (JIANGSU) CO., LTD.

×65	×2 _{1/2}	2	2	74.1	16.0		38.1	54.0	62.7	54.0	8.8	12.5	—	—	60.5	—
×50	×2	2	2	61.4	16.0		38.1	54.0	52.5	42.9	6.9	11.0	—	—	60.5	—
×40	×1 _{1/2}	2	2	48.9	12.5		41.2	57.0	40.9	34.0	6.4	8.9	—	—	60.5	—
×32	×1 _{1/4}	2	2	42.8	12.5		42.9	57.0	35.1	29.5	6.1	7.9	—	—	60.5	—

Note:

1) For the manufacturer's option, type 2 can be replaced by type 1.

2) The nominal size is shown as SD x B.